




www.tmmaterola.com

Tips for installation and maintenance



TECHNICAL SPECIFICATIONS E-650

PRODUCT

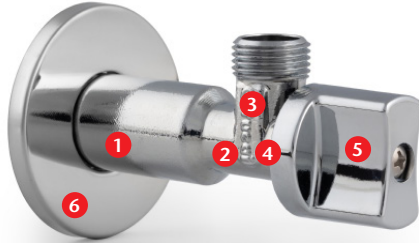

MATERIALS

- 1 BODY CW617N according to EN 12165, Chrome-plated
- 2 BALL CLOSURE POM
- 3 WATER-TIGHTNESS SEAL EPDM
- 4 WATER-TIGHTNESS ORINGS EPDM
- 5 HANDLE CHROME-PLATED ABS
- 6 TAILPIECE STAINLESS STEEL

FEATURES

NOMINAL PRESSURE 16 bar (PN-16).

ANTI-LIME, SOFT OPERATION

FLOW RATE >20 Lit/min at 3 bar, according to EN-ISO 3822-2

1/4 turn closure

WORKING TEMPERATURES 0°C to 70°C

All materials in contact with water are appropriate for use in water intended to human consumption.

DESCRIPTION

Angle valve to be installed on water supply systems of bathroom and kitchen taps, bidets, toilet tanks and appliances as washing machines.

Added the new anti-lime system KAREA SOLUTION from TMM, which makes this valve especially appropriate to resist lime effects lengthening its useful life.




APPROVALS



Spanish Royal Decree 140/2003

European Directive 98/83

MAIN DIMENSIONS

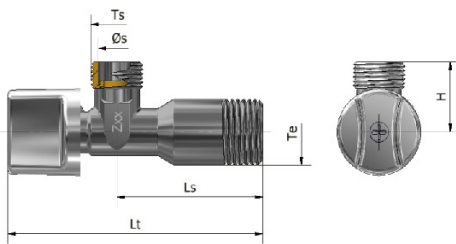

| Ref. | Dimensions (mm) | | | | | |
|---------|-----------------|------|----|----|------|----|
| | Ts | Te | Lt | Ls | Øs | H |
| 0400011 | 3/8" | 1/2" | 82 | 47 | 12,2 | 22 |
| 0400012 | 1/2" | | | | 15 | 24 |
| 0400015 | 3/8" | | 96 | 62 | 12,2 | 22 |
| 0400020 | 3/4" | | | | 20 | 26 |