

Polymer connector //Conexión con trenzado polimérico

TAQ FORTE ACB (DN13)



The industry's most advanced corrosion-resistant water connector is engineered for a longer lifespan under the harshest conditions.



Leer recomendaciones antes de su uso y/o instalación




Read recommendations before its use or installation



Applications

//Aplicaciones

Boilers and air conditioning
Calentadores y aire acondicionado



Characteristics and technical specifications

//Características y especificaciones técnicas

- Outer diameter:** 16,5 mm
Diámetro exterior
- Inner diameter:** 10,5 mm
Diámetro interior
- Fitting inner diameter:** 7,5 mm
Diámetro interior del racor
- Flow rate:** 45 l/min @ 3 bar
Caudal
- Minimum bending radius:** 35 mm
Radio de curvatura mínimo
- Working pressure:** 10 bar
Presión de trabajo
- Working temperature:** 90 °C
Temperatura de trabajo
- H₂O potable:** Yes
H₂O potable: Sí

Fittings

//Racores

Dn: 13



Nut G //Tuerca G
3/4"




Male G //Macho G
3/4"



Elbow //Codo
3/4"

Materiales

//Materiales

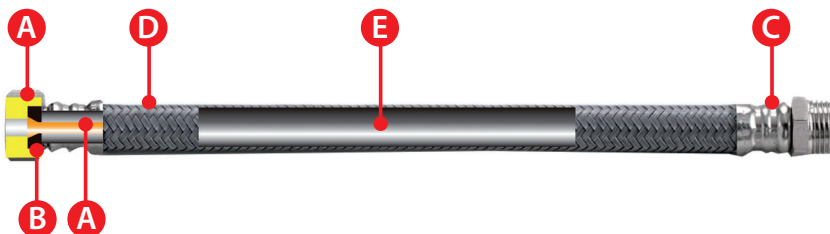

- A** Nickel-plated brass /
Latón niquelado
- B** EPDM
- C** Stainless steel AISI304 /
Acero inoxidable AISI304
- D** Polymer grey/black /
Polímero gris/negro
- E** EPDM

Information subject to change without notice.
//Información sujeta a cambios sin previo aviso